INKER & MASOR EXPLORING ELECTRODES




FOR HIGH AND LOW VOLTAGE HOLIDAY DETECTORS

Types:

Full Circle Spring
Half Circle Spring
Silicone-Rubber Brush
Wire Brush
Sponge
Internal Silicone-Rubber Disk
Internal Sponge Disk



AVAILABLE FROM STOCK!

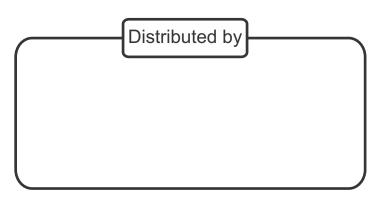

Types:


Internal Sponge Disk and Custom Electrodes available



www.teststations.com

www.tinker-rasor.com Info@tinker-rasor.com

www.detectron.com



INKER & KASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET EXPLORING ELECTRODES

Features:

- Full & Half Circle electrodes roll down pipe.
- Square spring gives closer contact to coating
- · Spring made of stainless steel
- Half circle springs have 190-degree arc
- Silicone-rubber is made of conductive material with very low resistivity
- Wire brushes are crimped stainless steel

Construction:

- Full Circle Spring electrodes cut to pipe diameter. 4" up to large diameters avail.
- Stainless steel and cadmium coated steel for corrosion resistance.
- Conductive silicone-rubber used in couplers, with high grade lubricant for years of use

Applications:

- Full circle and half circle springs used with T&R high voltage holiday detectors, to inspect pipeline coatings in plant or field.
- Silicone-Rubber brush used to inspect welds tanks, or other conductive substrates
- Wire brush used on coatings with irregular surfaces or joints, fittings, etc.

Sponge Electrodes

The Models M/1 and M1/AC low voltage holiday detectors use a cellulose sponge suitable for rapid wetting.

Sponge should be damp but not dripping when used.

Sponge ships compressed and must be wet to get to full size.

Tinker & Rasor exploring electrodes are designed to provide the user with a method of maintaining close, intimate contact with the coating.


DELIVERY: Immediately from STOCK

EX-Works San Bernardino, CA USA

SERVICE: 24-hour Turn-Around

TERMS: Net30 Days, on approval of credit

WARRANTY: **90 Days**, parts and labor,

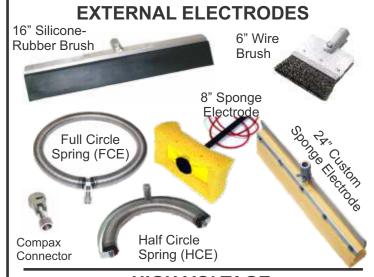

HIGH VOLTAGE INTERNAL ELECTRODES

Electrode Kit includes:
Electrode disc (sized to pipe)
093-010 Adapter kit
005-036 Plug, cable conn.
440-type Cable (length = pipe length
+ 8')
009-006 Adapter, powerpak

(required for AP/W)

Optional:

052-001 Roller assembly, single (10"+) 052-002 Roller assembly, double (16"+)


Lance Handle not included. Recommended to use 1/2" PVC

Double Discs available

LOW VOLTAGE INTERNAL ELECTRODES

Electrode Kit includes: Electrode disc (sized to pipe) 093-009 Adapter kit Cable (to length)

Double Discs Available



AVAILABLE FROM STOCK